

A50

SLENDER

Smart MiniPOS+




Food & Beverage



Fashion & Retail



Transportation

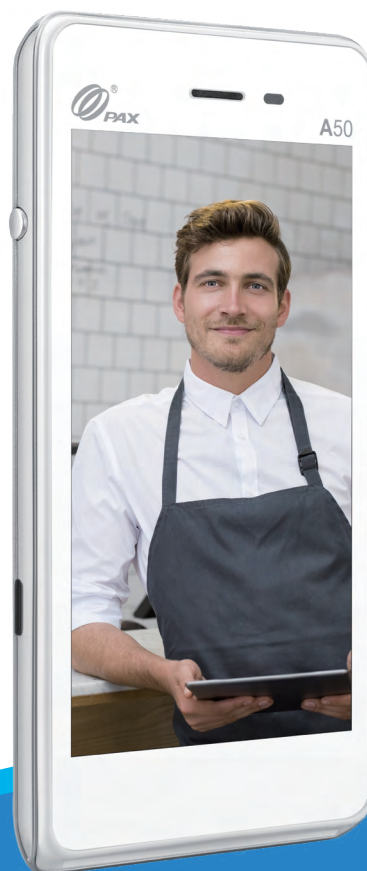

SMARTPOS



Powered by
Android
10 or 8.1



PCI 5
PCI 6
SRED



4.5" HD
Display



Up to 8MP Rear
2MP Front






















Advanced
Connectivity

A50

Android MiniPOS+

SPECIFICATIONS

	Operating System	PayDroid Powered by Android 10.0 (PCI 6) or 8.1 (PCI 5)
	Processor	Cortex A53 + ARM
	Memory	8GB eMMC Flash + 1GB DDR RAM Optional: 16GB eMMC Flash + 2GB DDR RAM Extended microSD Card Slot Up to 128GB
	Card Readers	Chip & PIN Contactless
	Cameras	2MP Rear-Facing Optional: 2MP Front-Facing + 8MP Rear-Facing
	Displays	4.5" FW 480 x 854 Pixels Multi-Point Capacitive Touch Screen
	Comms Configurations	4G + Wi-Fi® 2.4GHz + Bluetooth®
	Battery	2500mAh 3.8V
	Printer	No
	SIM / SAM	1 Nano SIM Optional: 2 Nano SIM
	Positioning	GPS GLONASS BEIDOU
	Keys / Buttons	4 Keys: Power ON/OFF Volume+ Volume- Quick Scan Button
	Audio	1 Buzzer 1 Speaker 2 Microphone 1 Audio Jack 1 Receiver
	Ports	1 Type-C OTG 5 PIN POGO PIN
	Adapter	Input: 100-240V AC, 50Hz/60Hz Output: 5.0V DC, 2.0A
	Physical	138 x 69.5 x 14mm, 161g (including battery)
	Environmental	0°C ~ 45°C (32°F ~ 113°F) Operating Temperature, Non-Charging -20°C ~ 70°C (-4°F ~ 158°F) Storage Temperature 5% ~ 95% Relative Humidity, Non-Condensing
	Accessories	B50: Charging Base 1 Power Port (Type-C) 98 x 62 x 49mm B51: 5-Devices Charging Base 98 x 210 x 49mm
	Certifications	PCI PTS 6.x (Android 10), PCI PTS 5.x (Android 8.1) EMV L1 & L2 EMV contactless L1 Visa payWave Mastercard contactless UPI qUICS American Expresspay Discover D-PAS JCB J/Speedy Interac Flash Mastercard TQM CE RoHs FCC IC UL WPC BIS Anatel ABECS

